

# Emergency LED Driver 15W & 30W For Isolated & Non Isolated Drivers



New Product

ITEM	G-48410	G-48411
DESCRIPTION	EM/15W/14.8Vdc/2000mA	EM/30W/29.6Vdc/3000mA
OUTPUT MAX MILLIAMPS	2000mA	3000mA
OUTPUT VOLTAGE	50-150Vdc	50-150Vdc
OUTPUT WATTAGE	15W	30W
ILLUMINATION TIME	90 Minutes	90 Minutes
INPUT VOLTAGE	120/347v	120/347v
CHARGING CURRENT	250mA	250mA
RECHARGING TIME	24 Hours	24 Hours
PACKAGE (INNER/MASTER)	15 Units	15 Units

**LIMITLESS OPTIONS FOR THE FOLLOWING APPLICATIONS COMPATIBLE WITH**

- T8 Lamps
- Slim Wafer
- Retrofits
- Downlight
- LED Bulbs
- Steplight


Listed for field installation UL924 and CSA C22.2 NO.141

Universal input 100-347Vac

Dimmable:  
10%



## Wiring Diagram

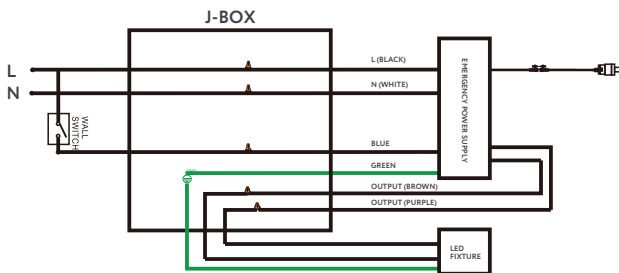

1. DO NOT MATE CONNECTOR UNTIL INSTALLATION IS COMPLETE AND AC POWER IS SUPPLIED
2. TEST ACCESSORY LEADS-OBSERVE PROPER POLARITY WIRING.

## Dimensions

