


4"
G-48331



4"
G-48332



4"
G-19765
G-19767 G-83447-50K

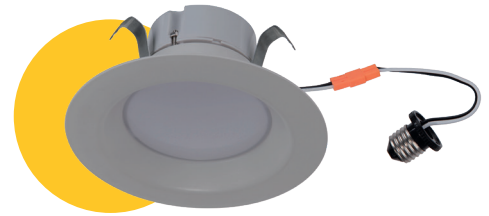

ITEM	G-48331	G-48332	G-19765	G-19767	G-83447-50K
DESCRIPTION	R4/14W/R/LED/5CCT	R4/10W/R/LED/5CCT	R4/10W/R/LED/27k	R4/12W/R/LED/41k	R4/10W/R/LED/50k
COLOR TEMP	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k	2700k	4100k	5000k
OUTPUT LUMEN	1100	850	750	850	750
BEAM ANGLE	100°	100°	100°	100°	100°
WATTAGE	14W	10W	10W	12W	10W
EQUIV. WATTAGE	100W	75W	65W	75W	65W
CRI	>90	>90	>90	>90	>90
DIMMABLE	Yes	Yes	Yes	Yes	Yes
PACK	12	12	24	24	24
OD	4.95	5.35	5.40	5.40	5.40
HEIGHT	3.5	2.84	2.80	1.70	2.80
ENVIRONMENT	Wet location	Wet location	Damp location	Damp location	Damp location

120V Dimmer List

BRAND	MODEL	DIMMING RATE
Cooper	DLC03P	10 - 100%
	1A1505 / 1C1605	10 - 100%
Leviton	6631 / 6633	10 - 100%
	CT-603PG / CT-600PR	10 - 100%

BRAND	MODEL	DIMMING RATE
Lutron	DV-600PR / DV603PG	10 - 100%
	DVW-603PGH / DVCL-153P	10 - 100%
	MACL-153M / TGCL-153P	10 - 100%
	S-600PR / S-2-LH	10 - 100%

Accessories

Emergency Led Driver

15W G-48410 30W G-48411
60W G-95521 25W G-95525



Dimmable:
5%



Lifetime:
50,000 hours



Warranty:
1 year

