


# 24V 120 WATTS 2835 LED TAPE LIGHT DIMMABLE



## G-48500

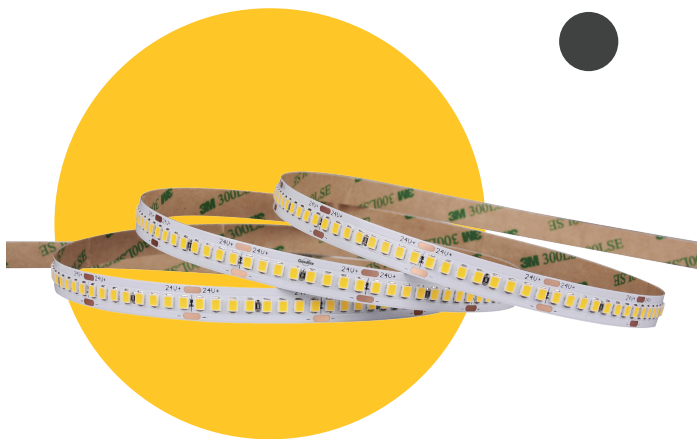

SOFT WHITE  
2700K

## G-48503



COOL WHITE  
4100K

## G-48501



WARM WHITE  
3000K

## G-48504



SUPER WHITE  
5000K

## G-48502



NEUTRAL WHITE  
3500K

ITEM	G-48500	G-48501	G-48502	G-48503	G-48504
DESCRIPTION	T224/2835/24W/27K	T224/2835/24W/30K	T224/2835/24W/35K	T224/2835/24W/41K	T224/2835/24W/50K
VOLTAGE	24V DC	24V DC	24V DC	24V DC	24V DC
WATTS	7.31 FT / 24W M	7.31 FT / 24W M	7.31 FT / 24W M	7.31 FT / 24W M	7.31 FT / 24W M
LUMENS	1179 Ft / 3871 M	1183 Ft / 3884 M	1203 Ft / 3948 M	1207 Ft / 3962 M	1220 Ft / 4003 M
BEAM ANGLE	120°	120°	120°	120°	120°
DIMMABLE	5%	5%	5%	5%	5%
LED QUANTITY	224	224	224	224	224
WIDTH	10 mm	10 mm	10 mm	10 mm	10 mm
HEIGHT	1.85 mm	1.85 mm	1.85 mm	1.85 mm	1.85 mm
CUTTABLE	1.40"	1.40"	1.40"	1.40"	1.40"
COLOR TEMPERATURE	Soft White 2700k	Warm White 3000k	Neutral White 3500k	Cool White 4100k	Super White 5000k
CRI	94>	94>	94>	94>	94>
ADHESIVE	3M 9495 300 MP	3M 9495 300 MP	3M 9495 300 MP	3M 9495 300 MP	3M 9495 300 MP
ROLL LENGTH	16.4 FT / 5 M	16.4 FT / 5 M	16.4 FT / 5 M	16.4 FT / 5 M	16.4 FT / 5 M

**Super High Density tape low pixels smooth and uniform beam. Light features highly efficient and compact LED chip sets that allow for tighter spacing without sacrificing lumen loss**

- Low heat generation, Channel not required for heat sink
- Double end impute power connection option
- Ultra-high lumen output capability
- 90+ color rendering index
- Available in 2700K, 3000K, 3500K, 4000K, and 5000K
- 50,000 hours rated life



Warranty:  
3 years



Dimmable:  
5%



Inner/Master  
25/100



Double end  
Connector



CRI 94+  
TRUE COLORS



BEAM ANGLE  
120°



IP 20



INDOOR  
USE



UL US  
LISTED