

LED CENTER INDIRECT 2X2 & 2X4 FIXTURES



**G-98126
G-98127 EM**



Wattage Selectable:
30W 40W 50W

**G-98128
G-98129 EM**




Wattage Selectable:
50W 60W 72W


ITEM	G-98126	G-98127 EM	G-98128	G-98129 EM
DESCRIPTION	F/2X2/50W/CI/WS3/4CCT	F/2X2/50W/CI/WS3/4CCT/EM	F/2X4/72W/CI/WS3/4CCT	F/2X4/72W/CI/WS3/4CCT/EM
COLOR TEMP	30, 35, 41, 50k	30, 35, 41, 50k	30, 35, 41, 50k	30, 35, 41, 50k
OUTPUT LUMEN	3310/4535/5360	3310/4535/5360	5400/6615/7780	5400/6615/7780
INPUT VOLTS	120-277V	120-277V	120-277V	120-277V
WATTAGE	30W/40W/50W	30W/40W/50W	50W/60W/72W	50W/60W/72W
CRI	90>	90>	90>	90>
DIMMABLE	0-10 Dimming	0-10 Dimming	0-10 Dimming	0-10 Dimming
HEIGHT	3.54"	3.54"	3.54"	3.54"
Size	23.74" x 23.74"	23.74" x 23.74"	23.74" x 47.76"	23.74" x 47.76"
Pack	1	1	1	1
EM Battery	No	Installed	No	Installed

Pack: 1

Diagram

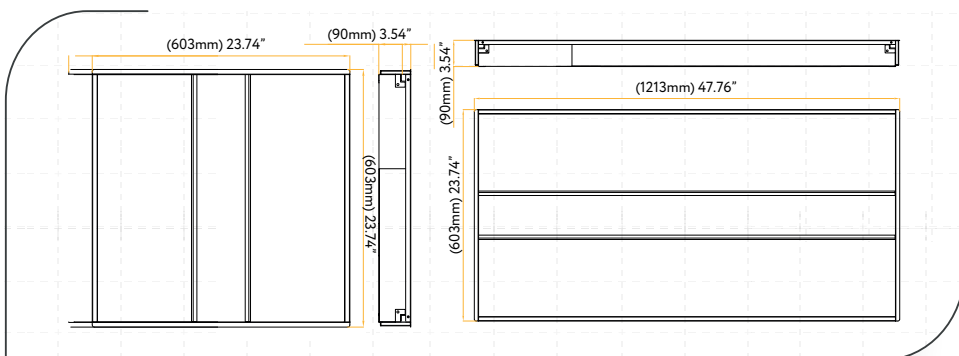

Accessories

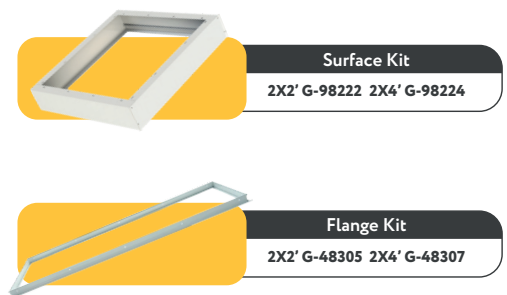

Dimmable: 0-10 Dimming
 Lifetime: 50,000 hours
 Warranty: 5 Years
 Multi Volts: 120-277V
 SELECTABLE COLOR TEMPERATURE
 CRI 90+ TRUE COLORS
 IC RATED
 DAMP LOCATION
 AIR TIGHT
 BEAM ANGLE 120
 ETL LISTED
 DLC LISTED PREMIUM
 FC