


GLAWRE[®] SURFACE MOUNT PANEL

1X1', 1X2', 1X4', 2X2', 2X4'



Accessories

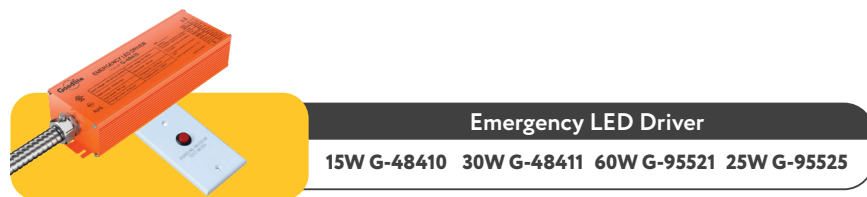

GLAWRE` SURFACE MOUNT PANEL

ITEM	G-12020	G-12021
SIZE	1X1	1X2
DESCRIPTION	GL/SM/1X1/WS3/LED/5CCT	GL/SM/1X2/WS3/LED/5CCT
WATTAGE	12/16/20W	18/24/30W
OUTPUT LUMEN	1400/1800/2200 LM	2100/2700/3300LM
INPUT VOLTS	120-277V	120-277V
OUTPUT VOLTS	46V - DC	46V - DC
mA	100-500mA	100-700mA
COLOR TEMP	30, 35, 41, 50, 65k	30, 35, 41, 50, 65k
CRI	80>	80>
DIMMABLE	0-10V DIM	0-10V DIM
BEAM ANGLE	120°	120°
FRAME	0.4"	0.4"
DIMENSIONS	11.93" X 11.93"	11.93" X 23.74"
HEIGHT	1.06"	1.06"
PACK	4	4

ITEM	G-12022	G-12023	G-12024
SIZE	1X4	2X2	2X4
DESCRIPTION	GL/SM/1X4/WS3/LED/5CCT	GL/SM/2X2/WS3/LED/5CCT	GL/SM/2X4/WS3/LED/5CCT
WATTAGE	30/40/50W	30/40/50W	40/50/62W
OUTPUT LUMEN	3660/4720/5750LM	3660/4720/5750LM	5000/6000/7500 LM
INPUT VOLTS	120-277V	120-277V	120-277V
OUTPUT VOLTS	46V - DC	46V - DC	46V - DC
mA	200-1000mA	200-1000mA	200-1450mA
COLOR TEMP	30, 35, 41, 50, 65k	30, 35, 41, 50, 65k	30, 35, 41, 50, 65k
CRI	80>	80>	80>
DIMMABLE	0-10V DIM	0-10V DIM	0-10V DIM
BEAM ANGLE	120°	120°	120°
FRAME	0.4"	0.4"	0.75"
DIMENSIONS	11.93" X 47.76"	23.74" X 23.74"	23.74" X 48"
HEIGHT	1.06"	1.06"	1.10"
PACK	2	4	2



Dimmable:
0-10V



Warranty:
5 years



Multi Volts:
120-277V




30-65K



CRI 80+
TRUE COLORS



Diagrams

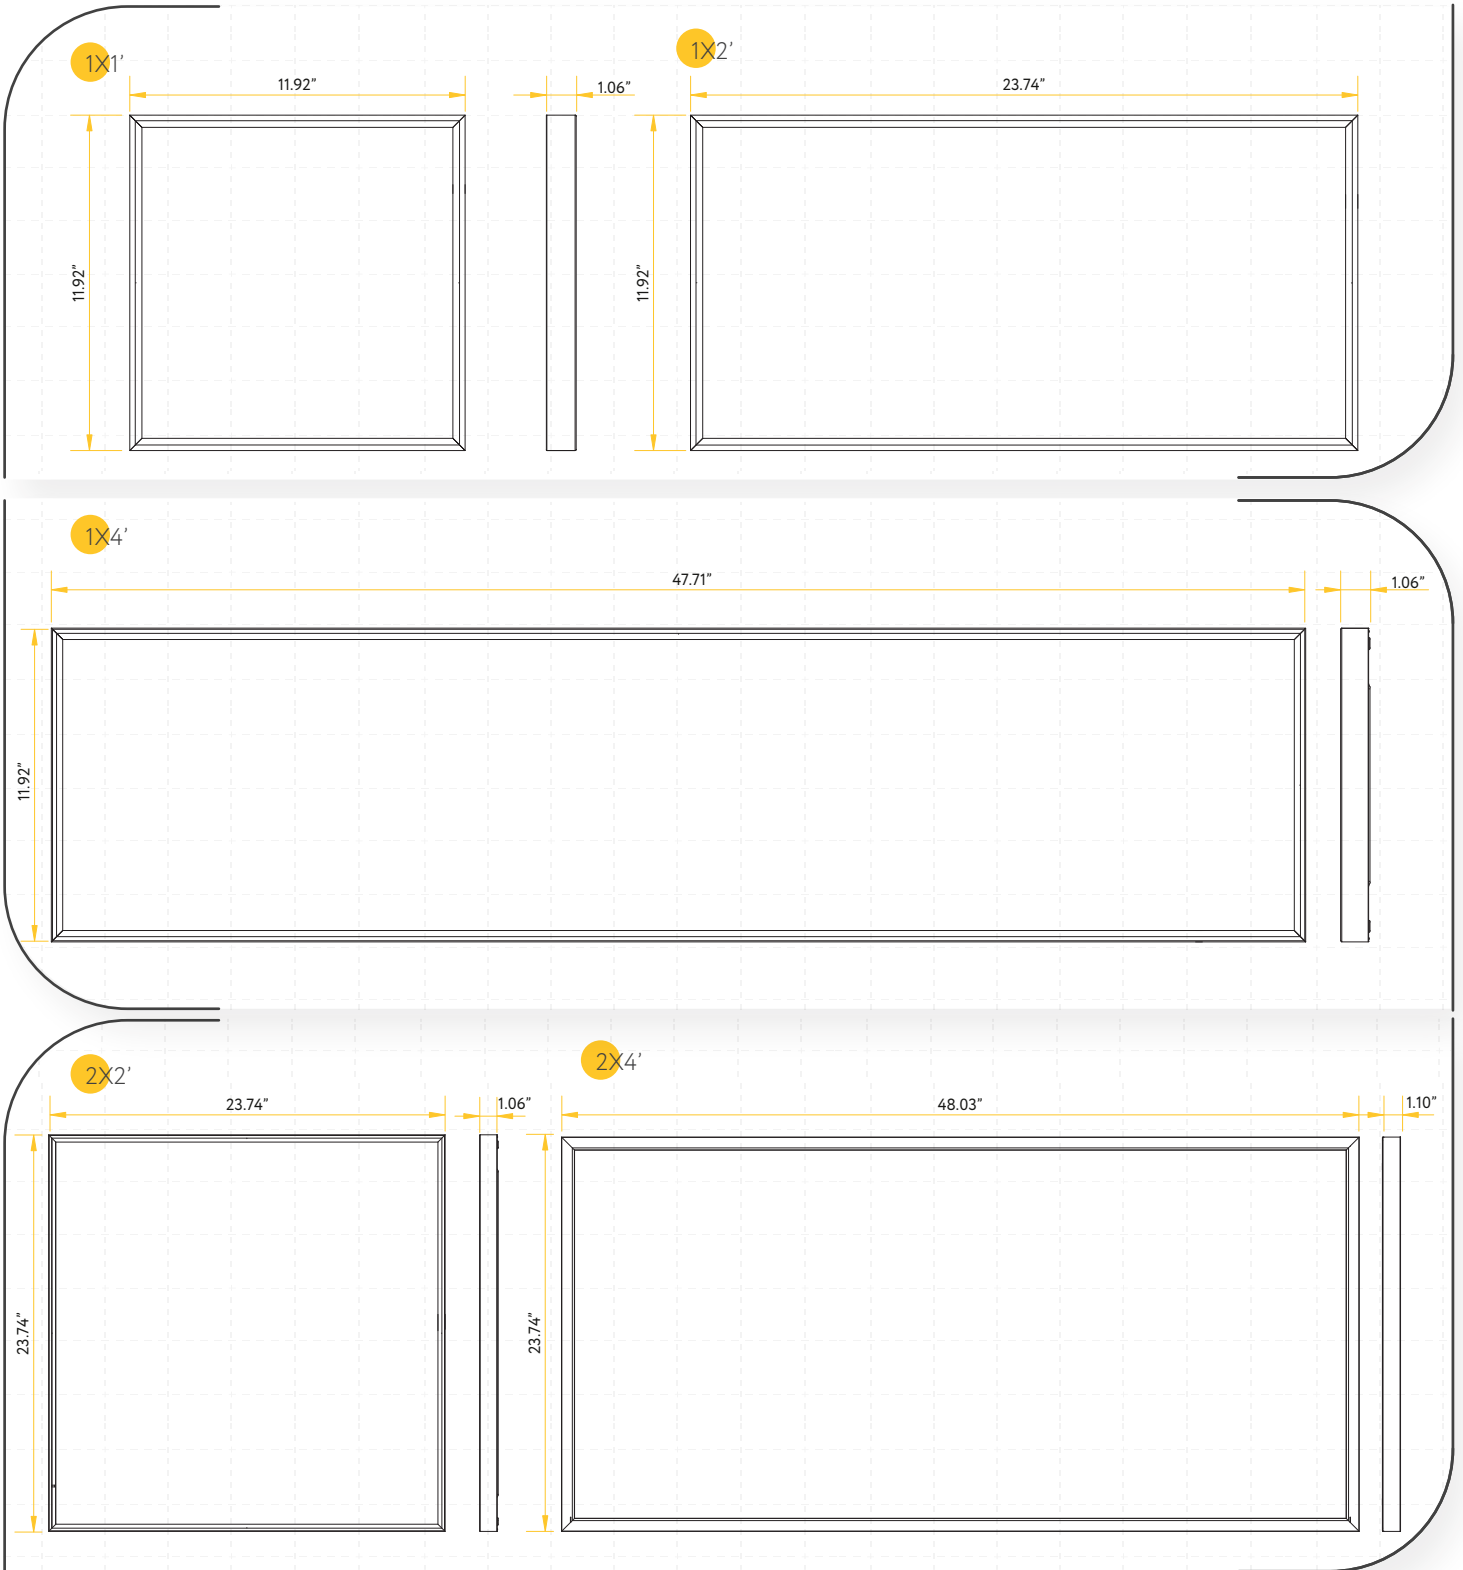

Dimmable:
0-10V



Warranty:
5 years



Multi Volts:
120-277V



30-65K

