

LED Universal Step Light



- SOFT WHITE** 2700K
- WARM WHITE** 3000K
- NEUTRAL WHITE** 3500K
- COOL WHITE** 4100K
- SUPER WHITE** 5000K

ITEM	G-20022		
DESCRIPTION	ST/2W/V/H/LED/5CCT/W	CRI	90>
COLOR TEMP	27, 30, 35, 41, 50k	DIMMABLE	Yes
OUTPUT LUMEN	125	HEIGHT	4.50"
TRIM FINISH	WHITE	WIDTH	2.75"
WATTAGE	2W	HEIGHT	3.50"
INPUT VOLTS	120V	PACK	18

DESIGNED TO MOUNT DIRECTLY IN STANDARD J-BOXES: 2" X 4"

Versatile Installation Options




These fixtures can be mounted either vertically or horizontally in a standard 2" x 4" junction box.

-  Dimmable: Down to 5%
-  Lifetime: 50,000 hours
-  Warranty: 3 years



Diagram

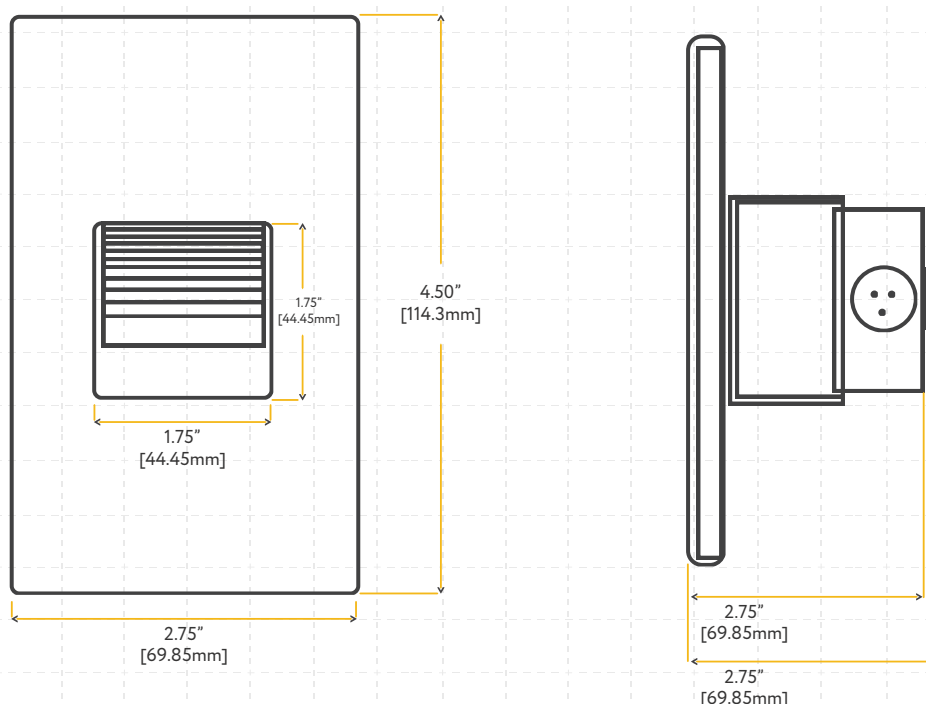

Dimmer List

BRAND	SERIES	MODEL	LOAD	DIMMABILITY	BRAND	SERIES	MODEL	LOAD	DIMMABILITY
LUTRON	ARIADNI	AYCL-153P	150W	OK	LUTRON	TOGGLER	TG-600P	600W	OK
	DIVA	DV-600PR	600W	OK		TOGGLER	TGCL-153P	150W	OK
	DIVA	DVCL-153P	150W	OK		CASETA	WIRELESS DIMMER	150W	OK
	MAESTRO	MACL-153MH	600W	OK		SURESLIDE	6633	600W	OK
	MAESTRO WIRELESS	MRF2-6CL	150W	OK	LEVITRON	SURESLIDE DECORA	6674	600W	OK
	ROTARY	D-600P	600W	OK		TRIMATRON	6602	600W	OK
	ELECTRONIC	NTELV-300P	600W	OK		ILLVMATECH	IPL06	600W	OK
	SKYLARK	S-600P	600W	OK		ADORNE	ADTP703TU	700W	OK
	SKYLARK CONTOUR	CT-600P	600W	OK	LEGRAND	HARMONY	H703PTW	700W	OK
	SKYLARK CONTOUR	CLCL-153P	153W	OK		ASPIRE	9540	1000W	OK
					COOPER	DEVINE	DAL06P	300W	OK