

# SATURN

## 2" GIMBAL ROUND HO FLUSHED



G-24520



G-24521

| ITEM         | G-24520                |              |                |            |               |
|--------------|------------------------|--------------|----------------|------------|---------------|
| DESCRIPTION  | R2/14W/GR/LED/2WS/5CCT | CRI          | 90>            | PACKED     | 18            |
| COLOR TEMP   | 27, 30, 35, 41, 50K    | mA           | 190/330mA      | CUT OUT    | 2.00"         |
| OUTPUT LUMEN | 1100/700               | OUTPUT VOLTS | 33-38V         | OD         | 2.55"         |
| BEAM ANGLE   | 60° (Default)          | IC RATED     | Only at 8W     | HIGHT      | 4.00"         |
| WATTAGE      | 14/8W                  | PLENUM RATED | FT6            | WIRE SPACE | 10 Cubic inch |
| INPUT VOLTS  | 120-277V               | DIMMABLE     | Triac Or 0-10V |            |               |

### Content

|                        |   |
|------------------------|---|
| Saturn 2" Gimbal Round |   |
| HO Flushed             | 1 |
| Accessories            | 1 |
| Lens Options           | 2 |
| Dimmer List            | 2 |

| ITEM         | G-24521                   |              |                |            |               |
|--------------|---------------------------|--------------|----------------|------------|---------------|
| DESCRIPTION  | R2/14W/GR/LED/2WS/5CCT/BK | CRI          | >90            | PACKED     | 18            |
| COLOR TEMP   | 27, 30, 35, 41, 50K       | mA           | 190/330mA      | CUT OUT    | 2.00"         |
| OUTPUT LUMEN | 1100/700                  | OUTPUT VOLTS | 33-38V         | OD         | 2.55"         |
| BEAM ANGLE   | 60° (Default)             | IC RATED     | Only at 8W     | HIGHT      | 4.00"         |
| WATTAGE      | 14/8W                     | PLENUM RATED | FT6            | WIRE SPACE | 10 Cubic inch |
| INPUT VOLTS  | 120-277V                  | DIMMABLE     | Triac Or 0-10V |            |               |

### Accessories



Emergency LED Driver

60W G-95521

25W G-95525

15W G-48410

30W G-48411



Extension Cords

G-20247 5ft

G-19822 20ft

G-20248 10ft

G-19823 30ft



New Construction Plate

G-19975



Interchangeable lens



Dimmable: Down to 5%



Lifetime: 50,000 hours



Warranty: 3 years



## Lens Options



### Clear Lens

G-25600



SN/L2/24-DEGREE

G-25601



SN/L2/40-DEGREE

G-25602




SN/L2/60-DEGREE

PACK

300

## Dimensions

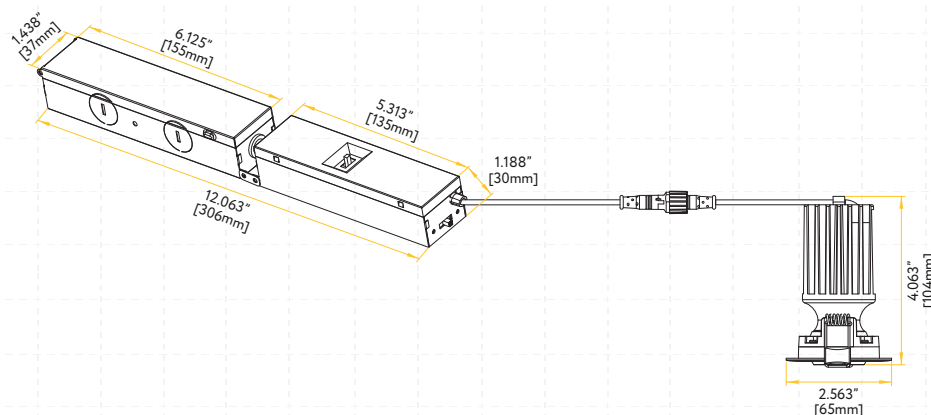

## Dimmer List

| BRAND  | SERIES          | MODEL       | LOAD | BRAND          | SERIES       | MODEL         | LOAD |
|--------|-----------------|-------------|------|----------------|--------------|---------------|------|
| LUTRON | SKYLARK CONTOUR | LECL-153P   | 150W | LUTRON         | TOGGLER      | TGCL-153P     | 150W |
|        |                 | CTCL-150H   | 150W |                | ARIADNI      | AYCL-153P     | 150W |
|        |                 | LGCL-153PLH | 150W |                | MAESTRO      | MACL-153M     | 600W |
|        |                 | CTCL-153P   | 150W | LEVITON        | ILLUMATECH   | IPL06         | 150W |
|        |                 | SCL-153P    | 150W |                | SURESLIDE    | 6672          | 150W |
|        |                 | S-600P      | 600W |                |              | 6674          | 150W |
|        | CASETA          | PD-6WCL     | 150W | EATON          | SMART DIMMER | AAL06         | 300W |
|        |                 | PD-5NE      | 150W | PASS & SEYMOUR | HARMONY      | DCL453PTCCCV6 | 150W |
|        |                 | PD-10NXD    | 250W | GE             | ROCKER       | 10464         | 150W |
|        | DIVA            | DVCL-153P   | 150W |                | TOGGLE       | 18027         | 150W |