

4.5 WATT 120V WET RATED TAPE LIGHT



26 FT

G-99620

SOFT WHITE
2700K

G-99621

WARM WHITE
3000K

G-99622

NEUTRAL WHITE
3500K

G-99623

COOL WHITE
4100K

G-99624

SUPER WHITE
5000K

Includes:

- 2PC 180° DIRECT CONNECTOR
- 2PC 90° DIRECT CONNECTOR
- 2PC 6" WIRE CONNECTOR
- 2PC 6" HARDWIRE STARTER
- 5PC MOUNTING CLIP KIT
- 5PC END CAP
- GLUE TUBE

100FT

G-99625

SOFT WHITE
2700K

G-99626

WARM WHITE
3000K

G-99627

NEUTRAL WHITE
3500K

G-99628

COOL WHITE
4100K

G-99629

SUPER WHITE
5000K

Includes:

- 2PC 180° DIRECT CONNECTOR
- 4PC 90° DIRECT CONNECTOR
- 4PC 6" WIRE CONNECTOR
- 4PC 6" HARDWIRE STARTER
- 10PC MOUNTING CLIP KIT
- 10PC END CAP
- GLUE TUBE

4.5 WATT 120V WET RATED TAPE LIGHT

ITEM	G-99620	G-99621	G-99622	G-99623	G-99624
DESCRIPTION	T/120V/4.5W/COB/IP67/27K	T/120V/4.5W/COB/IP67/30K	T/120V/4.5W/COB/IP67/35K	T/120V/4.5W/COB/IP67/41K	T/120V/4.5W/COB/IP67/50K
VOLTAGE	120V	120V	120V	120V	120V
WATTS	4.5 FT - 15 M	4.5 FT - 15 M	4.5 FT - 15 M	4.5 FT - 15 M	4.5 FT - 15 M
LUMENS	310 FT / 1030 M	330 FT / 1100 M	345 FT / 1150 M	360 FT / 1200 M	365 FT / 1214 M
BEAM ANGLE	120°	120°	120°	120°	120°
DIMMABLE	Yes (Triac)	Yes (Triac)	Yes (Triac)	Yes (Triac)	Yes (Triac)
COLOR TEMPERATURE	Soft White 2700k	Warm White 3000k	Neutral White 3500k	Cool White 4100k	Super White 5000k
WIDTH	12 mm	12 mm	12 mm	12 mm	12 mm
HIGHT	5 mm	5 mm	5 mm	5 mm	5 mm
CUTTABLE	3.94"	3.94"	3.94"	3.94"	3.94"
CRI	90	90	90	90	90
ADHESIVE	3M 9495 300 MP	3M 9495 300 MP	3M 9495 300 MP	3M 9495 300 MP	3M 9495 300 MP
ROLL LENGTH	26 FT / 8 M	26 FT / 8 M	26 FT / 8 M	26 FT / 8 M	26 FT / 8 M
PACKED	25	25	25	25	25

4.5 WATT 120V WET RATED TAPE LIGHT 100 FT

ITEM	G-99625	G-99626	G-99627	G-99628	G-99629
DESCRIPTION	T/120V/4.5W/COB/IP67/27K 100 FT	T/120V/4.5W/COB/IP67/30K 100 FT	T/120V/4.5W/COB/IP67/35K 100 FT	T/120V/4.5W/COB/IP67/41K 100 FT	T/120V/4.5W/COB/IP67/50K 100 FT
VOLTAGE	120V	120V	120V	120V	120V
WATTS	4.5 FT - 15 M	4.5 FT - 15 M	4.5 FT - 15 M	4.5 FT - 15 M	4.5 FT - 15 M
LUMENS	310 FT / 1030 M	330 FT / 1100 M	345 FT / 1150 M	360 FT / 1200 M	365 FT / 1214 M
BEAM ANGLE	120°	120°	120°	120°	120°
DIMMABLE	Yes (Triac)	Yes (Triac)	Yes (Triac)	Yes (Triac)	Yes (Triac)
COLOR TEMPERATURE	Soft White 2700k	Warm White 3000k	Neutral White 3500k	Cool White 4100k	Super White 5000k
WIDTH	12 mm	12 mm	12 mm	12 mm	12 mm
HIGHT	5 mm	5 mm	5 mm	5 mm	5 mm
CUTTABLE	3.94"	3.94"	3.94"	3.94"	3.94"
CRI	90	90	90	90	90
ADHESIVE	3M 9495 300 MP	3M 9495 300 MP	3M 9495 300 MP	3M 9495 300 MP	3M 9495 300 MP
ROLL LENGTH	100 FT / 30.5 M	100 FT / 30.5 M	100 FT / 30.5 M	100 FT / 30.5 M	100 FT / 30.5 M
PACKED	1	1	1	1	1

CONNECTORS



ITEM	G-00020	G-00021	G-00022	G-00023
DESCRIPTION	120V 180° DIRECT CONNECTOR 5PK	120V 90° DIRECT CONNECTOR 5PK	120V 6" WIRE CONNECTOR 2PK	120V 24" WIRE CONNECTOR 2PK

STARTER




ITEM	G-00024	G-00025	G-00026
DESCRIPTION	120V 6" HARD-WIRE STARTER 2PK	120V 24" HARD-WIRE STARTER 2PK	120V 6" PLUG STARTER 2PK

ACCESSORIES



ITEM	G-00028	G-00029
DESCRIPTION	120V MOUNTING CLIP 10PK (20 SCREWS)	120V END CAP 10PK + GLUE

Dimensions

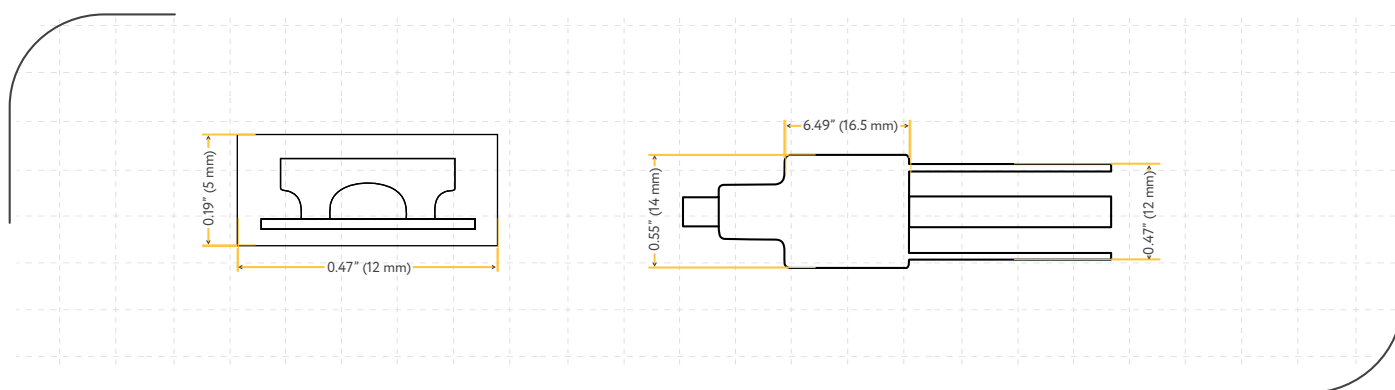

Lifetime:
50,000 hours



Warranty:
3 years



Dimmable:
5%



Double end
Connector



CRI 90+
TRUE COLORS



WET
LOCATION



AIR
TIGHT



BEAM
ANGLE
120°



IP 67



FCC



UL
LISTED