
MAGNETIC LED DRIVER DIMMABLE 24v 300 WATTS





ITEM	G-48457
DESCRIPTION	300W/24V/CV/DRIVER/DIM 120V
INPUT VOLTAGE	120VAC 50/60HZ
MAX, INPUT CURRENT AT FULL LOAD	1.5A
OUTPUT VOLTAGE WITHOUT LOAD	DC30V
OUTPUT VOLTAGE FULLY LOADED	DC24V
MAX, LOAD	300W
MAX, OUTPUT CURRENT	12.5A
MINIMUM LOAD	60% of the available wattage
EFFICIENCY	83%

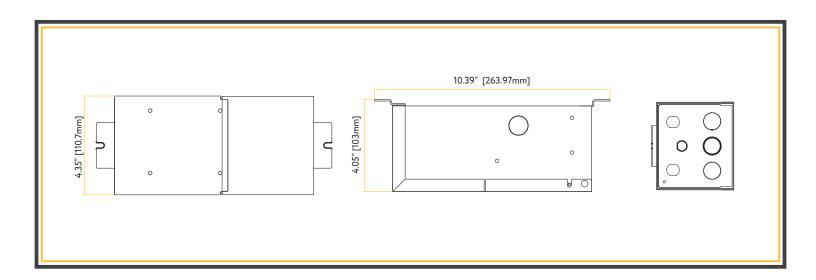

- · Magnetic dimmable driver
- · Automatic circuit breakers
- · Constant voltage output
- NEMA 3R enclosure, suitable for indoor outdoor locations
- Minimum load: 60% for on/off switching 20% for full range dimming
- · Driver should be loaded to 80% maximum
- Recommended to use with Goodlite LED tape light







Dimmable: 5%



Inner/Master 1/4



