


Emergency LED Driver

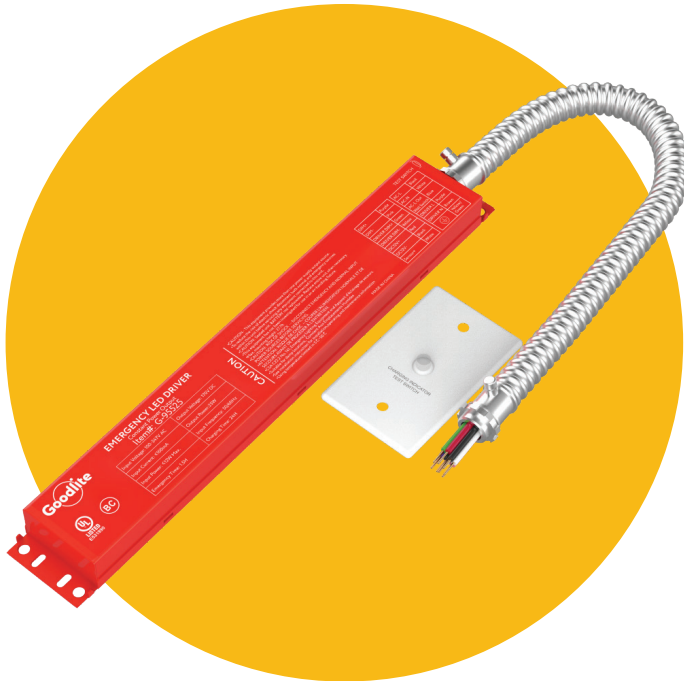

G-95525


ITEM	
DESCRIPTION	EM/120-347v /25w /170v DC/0-10
INPUT VOLTAGE	100-347V AC, 50/60Hz
INPUT CURRENT MAX	100mA
INPUT POWER MAX	12W
EMERGENCY TIME	90 minutes
CHARGING TIME	≥24 hours
OUTPUT VOLTAGE	170V DC
WARRANTY	5 Years
OUTPUT POWER	25W
BATTERY TYPE	Lithium
AMBIENT TEMP	5C ~ 50C (41 F~122 F)

FEATURES

- UL listed for factory and field installation
- Easy wiring: directly connect to AC INPUT OF LED Lights
- Universal Input voltage:100-347Vac,50/60Hz
- Self testing monthly/yearly
- Ideal for various kinds 0-10V dimmable indoor LED lights≤150W (Non 0-10v dimmable LED lights≤25W)



Dimensions

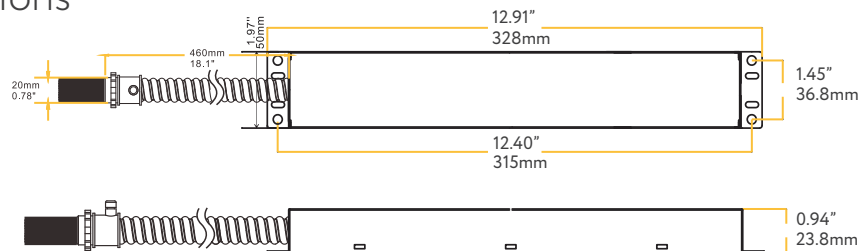

Applications

For 0-10V dimmable indoor LED luminaires up to 150W, Like LED panel, troffer, downlight, linear lights, highbay etc.

