


4" LED REGRESS GIMBAL LUMINAIRE SELECTABLE CCT



G-20091



G-20092

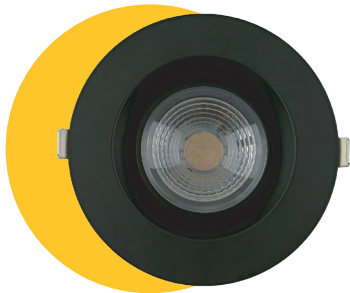

G-48366



G-48367



Pack:18

ITEM	G-20091	G-20092	G-48366	G-48367
DESCRIPTION	R4/14W/GRR/LED/5CCT	R4/14W/GSR/LED/5CCT	R4/14W/GRR/LED/BK/5CCT	R4/14W/GSR/LED/BK/5CCT
COLOR TEMPERATURE	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k
OUTPUT LUMEN	1100	1100	1100	1100
BEAM ANGLE	40°	40°	40°	40°
INPUT VOLTS	120V	120V	120V	120V
WATTAGE	14W	14W	14W	14W
EQUIV. WATTAGE	125W	125W	125W	125W
CRI	>90	>90	>90	>90
DIMMABLE	Yes	Yes	Yes	Yes
CUTOUT	4.55	4.55	4.55	4.55
OD	5.75	5.75	5.75	5.75
HEIGHT	3.20	3.20	3.20	3.20
mA	330 mA	330 mA	330 mA	330 mA
OUTPUT VOLTAGE	38v	38v	38v	38v



Dimmable:
5%




Lifetime:
50,000 hours



Warranty:
3 years



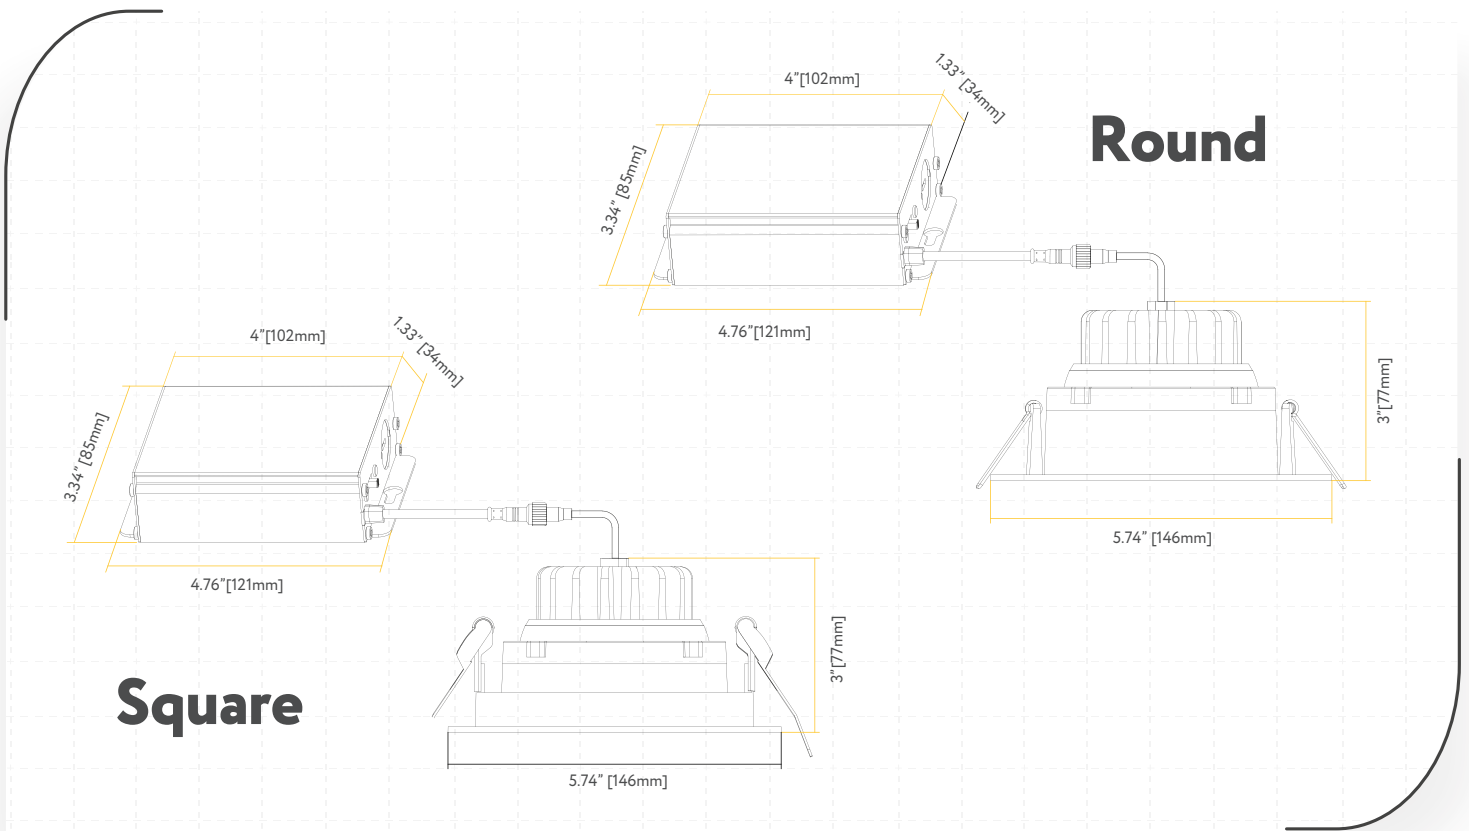

Dimmer List

BRAND	SERIES	MODEL	LOAD	BRAND	SERIES	MODEL	LOAD
LUTRON	SKYLARK CONTOUR	LECL-153P	150W	LUTRON	TOGGLER	TGCL-153P	150W
		CTCL-150H	150W		ARIADNI	AYCL-153P	150W
		LGCL-153PLH	150W		MAESTRO	MACL-153M	600W
		CTCL-153P	150W	LEVITON	ILLUMATECH	IPL06	150W
		SCL-153P	150W		SURESLIDE	6672	150W
		S-600P	600W		SURESLIDE	6674	150W
	CASETA	PD-6WCL	150W	EATON	SMART DIMMER	AAL06	300W
		PD-5NE	150W	PASS & SEYMOUR	HARMONY	DCL453PTCCCV6	150W
		PD-10NXD	250W	GE	ROCKER	10464	150W
	DIVA	DVCL-153P	150W		TOGGLE	18027	150W

Accessories

Emergency LED Driver

15W G-48410 30W G-48411
25W G-95525 60W G-95521




120-277V Driver

G-48302 0-10 Diming



New Construction Plate

ITEM G-19975 (5 Punch Outs)



Extension Cords

G-20247 5ft G-20248 10ft



Multi Driver Converter

Use with G-95825 14W

