


# 3" Trimless Multiple LED Gimbal Downlight Selectable CCT




- SOFT WHITE 2700K
- WARM WHITE 3000K
- NEUTRAL WHITE 3500K
- COOL WHITE 4100K
- SUPER WHITE 5000K

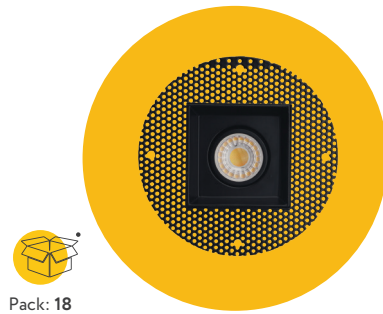


**G-95720**

Pack: 18



**G-95721**

Pack: 6

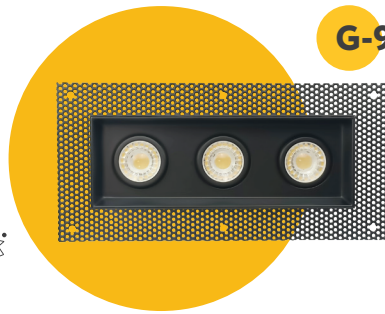

**G-95722**

Pack: 6



**G-97127**

Pack: 6

| ITEM          | G-95720                  | G-95721                    | G-95724                    | G-97127                     |
|---------------|--------------------------|----------------------------|----------------------------|-----------------------------|
| DESCRIPTION   | R3/8W/GRS/LED/TL/5CCT B  | R3/15W/GR/LED/M2/TL/5CCT B | R3/23W/GR/LED/M3/TL/5CCT B | R3/30W/GR/M4/LED/TL/5CCT BK |
| COLOR TEMP    | 27, 30, 35, 41, 50k      | 27, 30, 35, 41, 50k        | 27, 30, 35, 41, 50k        | 27, 30, 35, 41, 50k         |
| TRIM FINISH   | BLACK                    | BLACK                      | BLACK                      | BLACK                       |
| OUTPUT LUMEN  | 700                      | 1300 (650 each head)       | 1950 (650 each head)       | 2800 (700 each head)        |
| WATTAGE       | 8W                       | 15W                        | 23W                        | 30W                         |
| EQUIV WATTAGE | 65W                      | 200W                       | 200W                       | 275W                        |
| CRI           | >90                      | >90                        | >90                        | >90                         |
| DIMMABLE      | YES (Triac)              | YES (Triac)                | YES (Triac)                | Triac or 0-10 Dimming       |
| CUTOUT        | Square 3.35 / Round 5.00 | 3.35-6.29                  | 3.35-9.30                  | 3.35-12.50                  |
| OD            | 6.30                     | 5.60-8.60                  | 5.60-11.58                 | 5.60-14.66                  |
| HEIGHT        | 2.65                     | 2.65                       | 2.65                       | 2.65                        |
| mA            | 170mA                    | 350mA                      | 525mA                      | 750mA                       |
| INPUT VOLTS   | 120V                     | 120V                       | 120V                       | 120-227V                    |
| OUTPUT VOLTS  | 36V                      | 36V                        | 36V                        | 36V                         |



Dimmable:  
5%



Lifetime:  
50 000 hours



Warranty:  
3 years




# Dimmer List

| BRAND    | SERIES          | MODEL        | LODAL |
|----------|-----------------|--------------|-------|
| LUTRON   | SKYLARK CONTOUR | LECL-153P    | 150W  |
|          |                 | CTCL-150H    | 150W  |
|          |                 | LGCL-153PHLH | 150W  |
|          |                 | CTCL-153P    | 150W  |
|          |                 | SCL-153P     | 150W  |
|          |                 | S-600P       | 600W  |
|          | CASETA          | PD-6WCL      | 150W  |
| PD-5NE   |                 | 150W         |       |
| PD-10NXD |                 | 250W         |       |
| DIVA     | DVCL-153P       | 150W         |       |

| BRAND          | SERIES       | MODEL         | LODAL |
|----------------|--------------|---------------|-------|
| LUTRON         | TOGGLER      | TGCL-153P     | 150W  |
|                | ARIADNI      | AYCL-153P     | 150W  |
|                | MAESTRO      | MACL-153M     | 600W  |
|                | ILLUMATECH   | IPL06         | 150W  |
| LEVITON        | SURESLIDE    | 6672          | 150W  |
|                |              | 6674          | 150W  |
| EATON          | SMART DIMMER | AAL06         | 300W  |
| PASS & SEYMOUR | HARMONY      | DCL453PTCCCV6 | 150W  |
| GE             | ROCKER       | 10464         | 150W  |
|                | TOGGLER      | 18027         | 150W  |

## Diagram

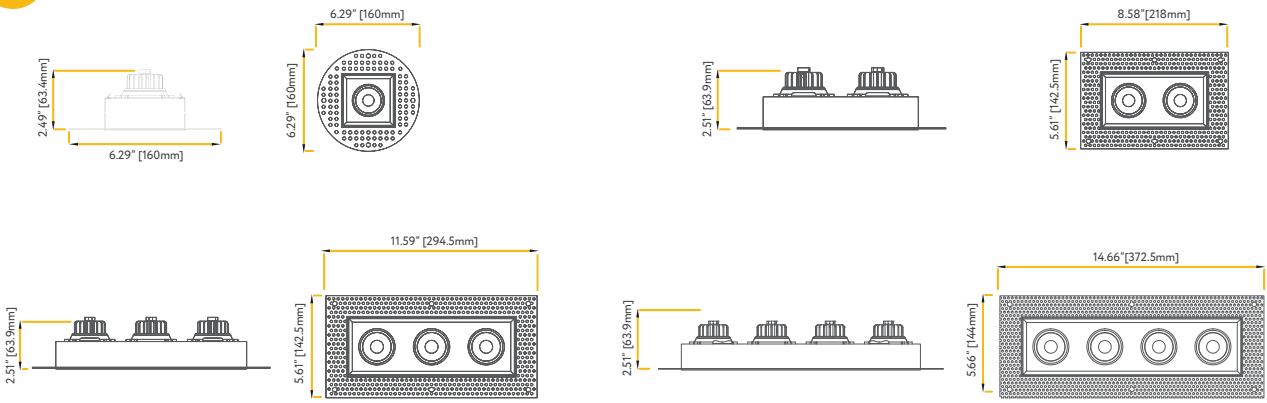

## Accessories

### Emergency LED Driver

- 15W G-48410
- 60W G-95521
- 30W G-48411




### Extension Cords

- G-20247 5ft
- G-20248 10ft



### New Construction Plate

- G-95720 Use Item G-19981 / 2 Punch Outs
- G-95721 Use Item G-48318 / 1 Punch Outs
- G-95724 Use Item G-48318 / 3 Punch Outs
- G-97127 Use Item G-48449 / 1 Punch Outs



### 120-277V Drivers (0-10 Dimming)

- G-95720 Need to Use G-48300
- G-95721 Need to Use G-48321
- G-95722 Need to Use G-48322

