

Fire Rated LED Recessed Wafer UL 263 & ASTM E119 Certified



ITEM	G-96921	WIRE	FT6 Plenum rated
DESCRIPTION	S3/8W/R/LED/SCCT FR	DIMMABLE	TRIAC OR 0-10
COLOR TEMP	27, 30, 35, 41, 50k	OD	3.70
OUTPUT LUMEN	600	HEIGHT	1.52
INPUT VOLTS	120/277V	CUTOUT	2.85
WATTAGE	8W	mA	190 mA
EQUIV WATTAGE	50W	OUTPUT VOLTS	33-38V
CRI	>90	NC PLATE	G-19969

ITEM	G-96922	WIRE	FT6 Plenum rated
DESCRIPTION	S4/12W/R/LED/SCCT FR	DIMMABLE	TRIAC OR 0-10
COLOR TEMP	27, 30, 35, 41, 50k	OD	4.72
OUTPUT LUMEN	925	HEIGHT	1.52
INPUT VOLTS	120/277V	CUTOUT	3.90
WATTAGE	12W	mA	270 mA
EQUIV WATTAGE	75W	OUTPUT VOLTS	33-38V
CRI	>90	NC PLATE	G-19969

ITEM	G-96923	WIRE	FT6 Plenum rated
DESCRIPTION	S5/15W/R/LED/SCCT FR	DIMMABLE	TRIAC OR 0-10
COLOR TEMP	27, 30, 35, 41, 50k	OD	5.90
OUTPUT LUMEN	1200	HEIGHT	1.52
INPUT VOLTS	120/277V	CUTOUT	4.90
WATTAGE	15W	mA	350 mA
EQUIV WATTAGE	100W	OUTPUT VOLTS	33-38V
CRI	>90	NC PLATE	G-19981

ITEM	G-96924	WIRE	FT6 Plenum rated
DESCRIPTION	S6/18W/R/LED/SCCT FR	DIMMABLE	TRIAC OR 0-10
COLOR TEMP	27, 30, 35, 41, 50k	OD	7.20
OUTPUT LUMEN	1600	HEIGHT	1.54
INPUT VOLTS	120/277V	CUTOUT	6.10
WATTAGE	18W	mA	430 mA
EQUIV WATTAGE	150W	OUTPUT VOLTS	33-38V
CRI	>90	NC PLATE	G-19969

P. 1



Dimmable: 5%



Lifetime: 50 000 hours



Warranty: 3 years



Pack: 18




Dimmer List

BRAND	SERIES	MODEL	LODAL
LUTRON	SKYLARK CONTOUR	LECL-153P	150W
		CTCL-150H	150W
		LGCL-153PHLH	150W
		CTCL-153P	150W
		SCL-153P	150W
		S-600P	600W
	CASETA	PD-6WCL	150W
		PD-5NE	150W
		PD-10NXD	250W
	DIVA	DVCL-153P	150W

BRAND	SERIES	MODEL	LODAL
LUTRON	TOGGLER	TGCL-153P	150W
	ARIADNI	AYCL-153P	150W
	MAESTRO	MACL-153M	600W
	ILLUMATECH	IPL06	150W
LEVITON		6672	150W
		6674	150W
EATON	SMART DIMMER	AAL06	300W
PASS & SEYMOUR	HARMONY	DCL453PTCCV6	150W
GE	ROCKER	10464	150W
	TOGGLER	18027	150W

Diagram

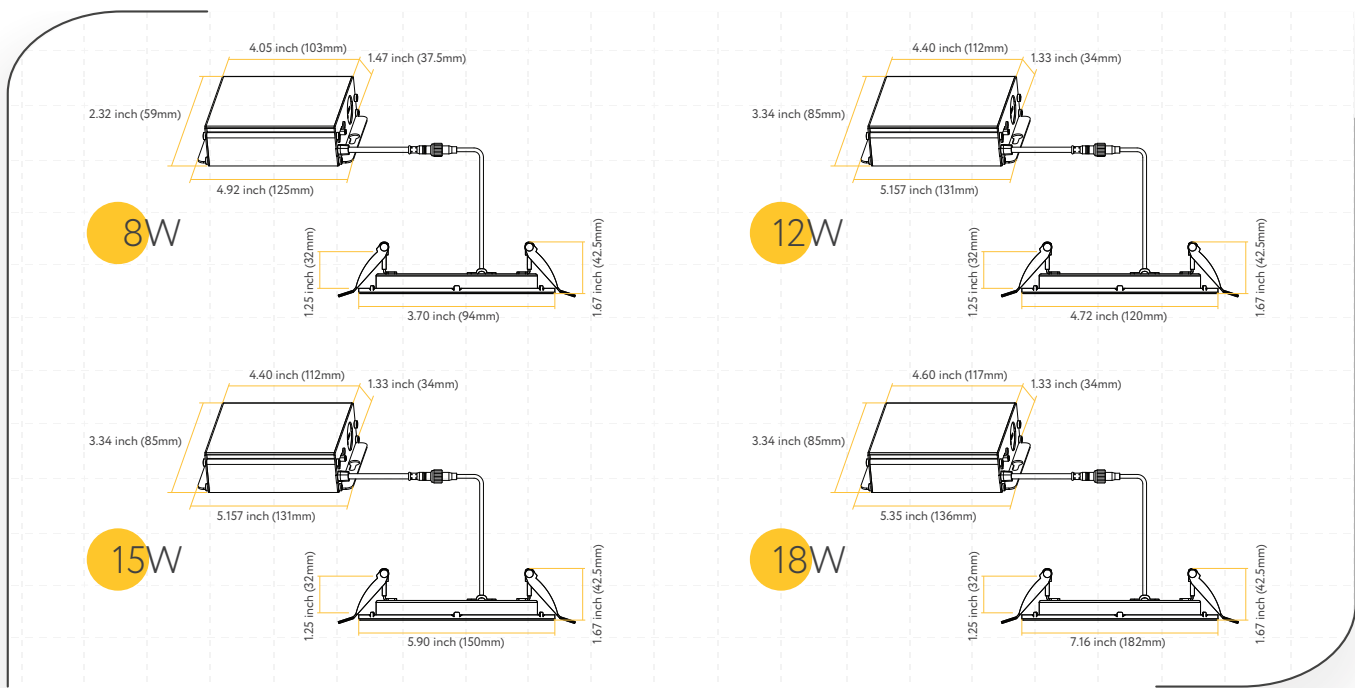

Accessories

- Emergency LED Driver**
 - 15W G-48410
 - 30W G-48411
 - 25W G-95525
 - 60W G-95521
- Extension Cords**
 - G-20247 5ft
 - G-20248 10ft
- New Construction Plate**
 - "Look above by each item"
- Multi Driver Converter**
 - G-96921 use with G-95823 8W
 - G-96922 use with G-95824 12W
 - G-96923 use with G-95825 14W
 - G-96924 use with G-95825 18W

